



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 10 March 2004






21MAR03 E74051-1 068900
P012700 0.00-0306484.7

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office
Cardiff Road
Newport
Gwent
NP10 8QQ

1.	Your reference	P-UK-PR1095		
2.	Patent application number <small>(The Patent Office will fill in this part)</small>	0306484.7		21 MAR 2003
3.	Full name, address and postcode of the or of each applicant <small>(underline all surnames)</small>	BLACK & DECKER INC DRUMMOND PLAZA OFFICE PARK 1423 KIRKWOOD HIGHWAY NEWARK, DELAWARE, USA		
	Patents ADP number <small>(if you know it)</small>			
	If the applicant is a corporate body, give the country/state of its incorporation	DELAWARE, USA	341214004	
4.	Title of the invention	DUST COLLECTION UNIT		
5.	Name of your agent <small>(if you have one)</small> "Address for service" in the United Kingdom to which all correspondence should be sent <small>(including the postcode)</small>	DARRIN M SHAYA; IAN S BELL; MARCUS A M CAVALIER BLACK & DECKER PATENT DEPARTMENT 210 BATH ROAD SLOUGH SL1 3YD United Kingdom		
	Patents ADP number <small>(if you know it)</small>	7570971 001		
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and <small>(if you know it)</small> the or each application number	Country	Priority application number <small>(if you know it)</small>	Date of filing <small>(day / month / year)</small>
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing <small>(day / month / year)</small>	
8.	Is a statement of inventorship and of right to grant of a patent required in support of this request? <small>(Answer 'Yes' if:</small> <div style="margin-left: 20px;"> a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d)) </div>			
	/ YES			

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	9
Claim(s)	4
Abstract	1
Drawing(s)	2

1 set

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

1

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application

Signature *I S Bell*

Date: 20 March 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Maureen O'Reilly

01753 500676

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.


Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.



7/77

Statement of inventorship and of right to grant of a patent



The Patent Office
Cardiff Road
Newport
Gwent
NP10 8QQ

1.	Your reference	P-UK-PR1095	
2.	Patent application number <i>(if you know it)</i>	0306484.7	21 MAR 2003
3.	Full name of the or of each applicant	BLACK & DECKER INC	
4.	Title of the invention	DUST COLLECTION UNIT	
5.	State how the applicant(s) derived the right from the inventor(s) to be granted a patent	By virtue of employment and in accordance with Section 39 of The Patents Act 1997	
6.	How many, if any, additional Patents Forms 7/77 are attached to this form? <i>(see note (c))</i>	NONE	
7.	<p>I/We believe that the person(s) named over the page <i>(and on any extra copies of this form)</i> is/are the inventor(s) of the invention which the above patent application relates to.</p> <p style="text-align: center;">Signature Date: 20 March 2003</p> <p style="text-align: center;"><i>I S Reilly</i></p>		
8.	Name and daytime telephone number of person to contact in the United Kingdom	Maureen O'Reilly	01753 500676

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- d) When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- e) Once you have filled in the form you must remember to sign and date it.

- Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

KLAUS-DIETER ARICH
AM ALTEN SPORTPLATZ 33
65510 HUENSTETTEN - BEUERBACH
GERMANY

Patents ADP number (if you know it): 859260200i

Patents ADP number (if you know it):

Patents ADP number (if you know it):

Reminder

Have you signed the form?

DUST COLLECTION UNIT

The present invention relates to a dust collection unit suitable for use with a hand held drilling and/or hammering tool and to a shroud and a shroud adapter for such a dust collection unit.

5 Hand held drilling and/or hammering tools are known which can be used with a dust collection unit accessory. The collection unit, may be releasably mechanically mounted on the tool and will generally comprise a shroud for collecting dust from the region of a tool or bit of the tool, a dust collection chamber, a filter and a system for generating an airflow into and through the shroud, the chamber and the filter. Dust and debris generated by the tool or bit of the tool will be entrained in this airflow and so will be pulled through the shroud and into the chamber. As the air passes through the filter, any dust or debris entrained within it will be deposited in the chamber.

15 In some known designs of shroud, for example of the type shown on the dust collection unit of Figure 2, the shroud (32) is mounted on a support arm (36) within which support arm is formed a channel which communicates between the shroud and a dust collection chamber (41). A problem with such designs is that the shroud has an extension (14) for fitment to the support arm (36) which prevents the shroud from fitting into difficult to reach places. For example the shroud cannot easily be positioned so as to fit around pipes or ducting, to drill a hole closer than a distance d_1 above the edge of the pipes or ducting and cannot easily be positioned so as to fit into channels with a width less than d_2 . In addition the shroud (32) is not very effective to collect dust when a hole is to be drilled into a corner as the forward rim of the shroud is adapted to fit to a flat surface and so will not fit the shape of the corner.

25 The present invention aims to provide a flexible design of shroud arrangement for a dust collection unit which can be used for efficiently collecting dust when a drilling and/or hammering tool is used to work on a variety of difficult to reach locations.

30 According to a first aspect of the present invention there is provided a dust collection unit suitable for use with a hand held drilling and/or hammering tool, comprising:

a shroud of the dust extraction unit adapted to extend around a tool or bit of such a hammering and/or drilling tool so as to collect dust in an airflow passing through the shroud which dust is generated by such a tool or bit; and a tube like extension sleeve which extends forwardly of the shroud;

5 characterised in that a slideable sleeve is slideably mounted on the extension sleeve so as to move between a retracted position in which the forward rim of the extension sleeve is engageable with a surface to be worked and an extended position in which a forward rim of the slideable sleeve is engageable with a surface to be worked and the forward ends of the extension sleeve and the slideable sleeve are shaped

10 differently from each other so as to fit against a different shaped work surface.

This provides a more versatile shroud arrangement on a dust extraction unit which can be used to collect dust when different shaped work surfaces are drilled. Also, by using a shroud equipped with the tube like forward extension sleeve, dust

15 can be collected, when a tool or bit of a hammering and/or drilling tool is used to drill into a channel or around an obstruction.

Preferably one of the extension sleeve or the slideable sleeve is tapered at its forward end so as to have a forward rim which fits into a corner surface to be worked.

20 The other of the extension sleeve or the slideable sleeve may have a forward rim which extends perpendicularly to the longitudinal axis of such a tool or bit so as to fit against a plane surface to be worked. With the slideable sleeve in one of its extended or retracted positions, the tapered rim of the one of the extension or slideable sleeve fits against the surfaces of a corner so that an airflow passing into

25 the shroud, for example in the region of the rim, carries any dust generated by the tool or bit in the generated airflow. When it is necessary to drill into the flat base of a channel, or into a working surface adjacent to pipes or boxed in cables, with the slideable sleeve in the other of its extended or retracted positions, the rim of the other of the extension sleeve or slideable sleeve can fit against the surface to be worked

30 so that an airflow passing into the shroud, for example in the region of the rim, carries any dust generated by the tool or bit in the generated airflow. Thus, a dust collection unit having a versatile dust collection shroud is provided. In a preferred embodiment the extension sleeve has a tapered forward rim and the sliding sleeve has a plane forward rim.

To provide additional flexibility, the tube like extension sleeve and the slideable sleeve may be formed as an adapter which can be releasably fitted to the shroud. Therefore, when boring into a large flat surface, such as an interior wall of a house, a conventional shroud of relatively small size, for example of the type (32) shown in Figure 2, can be used. Then when drilling into a channel or into a corner, the adapter can be fitted to the shroud, for example using a snap fit connection or a simple friction connection.

In order to fit against the surfaces of a corner, the tapered forward rim of the relevant sleeve may be tapered so as to have a pair of opposing V-shaped ridges. In a simple form, the tube like extension sleeve and the slideable sleeve may be cylindrical.

The sliding sleeve may be slideably mounted around the extension sleeve or alternatively may be slideably mounted within the extension sleeve. Where the extension sleeve is the tapered sleeve, the sliding sleeve may be biased into its extended position by a spring arrangement, so that when it is necessary to drill into a corner the sliding sleeve may be retracted against the biasing force of the spring, for example automatically, by engagement with the corner surface to be worked. Alternatively some releasable means may be provided to maintain the sliding sleeve in the retracted position.

According to a second aspect of the present invention there is provided a shroud adapter suitable for fitment to a dust collecting shroud of a dust collection unit, which dust collection unit is suitable for use with a hand held drilling and/or hammering tool, the adapter comprising a tube like extension sleeve which can be releaseably fitted to such a shroud so as to extend forwardly from such a shroud, characterised in that a slideable sleeve is slideably mounted on the extension sleeve so as to move between a retracted position in which the forward rim of the extension sleeve is engageable with a surface to be worked and an extended position in which a forward rim of the slideable sleeve is engageable with a surface to be worked and the forward ends of the extension sleeve and the slideable sleeve are shaped differently from each other so as to fit against a different shaped work surface.

According to a third aspect of the present invention there is provided a dust collection shroud suitable for use with a dust collection unit, which dust collection unit is suitable for use with a hand held drilling and/or hammering tool, which shroud can be releasably fitted to such a dust extraction unit and so as to extend around a tool or bit of such a hammering and/or drilling tool so as to collect dust in an airflow passing through the shroud which dust is generated by such a tool or bit, the shroud additionally comprising a tube like extension sleeve which extends forwardly, with respect to such a tool or bit, characterised in that a slideable sleeve is slideably mounted on the extension sleeve so as to move between a retracted position in which the forward rim of the extension sleeve is engageable with a surface to be worked and an extended position in which a forward rim of the slideable sleeve is engageable with a surface to be worked and the forward ends of the extension sleeve and the slideable sleeve are shaped differently from each other so as to fit against a different shaped work surface.

The second and third aspects of the present invention have the same advantages and subsidiary features as are described above in relation to the first aspect of the present invention.

One form of a shroud arrangement of a dust collection unit in accordance with the present invention will now be described by way of example with reference to the accompanying drawings in which:

Figure 1 shows a perspective view of a rotary hammer to which a dust collection unit in accordance with the present invention can be fitted;

Figure 2 shows a longitudinal cross-section of a dust collection unit for attachment to the rotary hammer of Figure 1;

Figure 3 shows a longitudinal cross-section of a shroud arrangement for use with the dust collection unit of Figure 1 in accordance with the present invention;

Figure 4A shows a side view of the shroud arrangement of Figure 3 in a retracted position for collecting dust when holes are bored in corners;

Figure 4B shows a similar view to that in Figure 4A but with the shroud arrangement in an extended position;

Figures 5A and 5B show the shroud arrangement of Figures 3, 4A and 4B from two perspective views in the extended position; and

Figures 6A and 6B show the shroud arrangement of Figures 3, 4A and 4B from two perspective views in the retracted position.

The hand held rotary hammer shown in Figure 1 has a housing comprising a motor housing portion (2) within which an electric motor of the hammer is housed. A tool holder (26) is located at the forward end of a spindle of the hammer. A tool or bit (24) can be non-rotatably and releasably fitted within the tool holder so as to allow limited reciprocation of the tool or bit with respect to the tool holder. The hammer has a rear handle (18) in which an on/off trigger (20) is located for actuating a switch for actuating power supply to the motor. The motor of the hammer selectively drives a spindle drive mechanism for rotatingly driving the spindle of the hammer, thereby rotatingly driving the tool holder (26) and a tool or bit (24) mounted therein, as is well known in the art. Also, the motor of the hammer selectively drives an air cushion hammering mechanism for repeatedly impacting the tool or bit (24), as is well known in the art. A mode change arrangement, actuated by a mode change knob (50), is provided for enabling the selective engagement of rotary drive to the spindle and/or selective actuation of the air cushion hammering mechanism so that the hammer can be operated in a drilling only mode, a hammering only mode and/or a combination rotary hammering mode, as is well known in the art. The rotary hammer is powered by a mains or generator supply of electricity, via a cable (19).

Figure 2 shows a dust collection unit (40) for the hammer. The dust collection unit comprises a dust collection shroud (32) which, when the unit (40) is mounted on the hammer, surrounds the forward end of a tool or bit (24) mounted in the tool holder (26) of the hammer. The shroud (32) forms a chamber around the forward end of the tool or bit (24), with an annular side wall (30) and a rearward wall which is formed by a flexible brush, or seal (34) which fits around the tool or bit (24). The shroud (32) has an extension (14) which is mounted on a forward end of a support arm (36). The annular wall (30) has an opening (13) at the entrance to the extension (14), to enable a channel through the extension (14) to communicate with the shroud chamber. A support arm (36) of the dust collection unit is telescopically mounted within a receiving portion (38) of a main housing of the dust collection unit (40). The support arm (36) can be pushed into the receiving portion (38) against a biasing force from a spring arrangement (not shown) contained in the receiving portion (38). A

channel extends along the support arm (36) with a first end of the channel communicating with the chamber of the shroud (32), via the extension (14), and the second end of the channel communicating with an entrance (45) to a filter chamber (41) of the unit (40).

5

A filter arrangement, for example a filter bag (43) is housed within the filter chamber. The filter chamber has an inlet (45) which communicates with the channel in the support arm (36) and an outlet (47) which communicates with an inlet to a fan (49). The fan is powered by a motor (51) housed in the rearward housing portion (53) of the dust collection unit (40).

10

With the dust collection unit of Figure 2 is mounted on the rotary hammer of Figure 1, the forward end of the tool or bit (24) is pressed against the surface to be worked and the shroud (32) is positioned, by telescoping the support arm (36) within the receiving portion (38), so that a forward rim (33) of the shroud (32) is pressed against a flat surface to be worked. Then when the motor of the hammer is actuated, by depressing the trigger (20) of the hammer, the motor of the hammer is actuated and drilling and/or hammering commences, depending on the mode of operation of the hammer selected by the mode change knob (50). The depression of the trigger (20) also actuates the motor (51) of the dust extraction unit (40) fitted to the hammer, as described below.

15

20

The fan (49) generates an airflow which is pulled into the shroud (32), for example via one or more recesses (35) in the forward face of the rim (33) of the shroud (32), and from the shroud, via the extension (14), through the channel in the support arm (36) and into the inlet (45) to the filter housing (41). The dust generated by the working of the tool or bit is entrained in this airflow and thus transported into the filter housing. The dust is captured in the filter housing in the filter bag (43) and the air passes through the filter bag and into the inlet (47) of the fan (49). The air passes through the fan and is discharged out of an outlet of the fan formed in the rearward housing portion (53) of the dust collection unit. As the tool or bit (24) moves into the surface being worked, the support arm (36) retracts against the biasing force of the spring arrangement and maintains the forwardmost rim of the shroud against

25

30

the surface being worked. When the trigger (20) of the hammer is released, the power to the hammer motor and the fan motor (51) is disconnected.

When the dust collection unit (40) is fitted to the hammer, an electrical connection is formed between the motor (51) of the dust collection unit and the electricity supply to the hammer via a three pinned plug element (12). The region of the hammer (21), which connects the lower end of the rear handle (18) with the motor housing (2) is formed on its underside with a socket arrangement (16). The socket arrangement (18) is formed with three sockets for receiving three pins (6) of the plug arrangement (12) in order to make an electrical connection between the motor (51) of the dust collection unit (40) and the electrical power supply to the hammer.

The region (A) of the housing of the hammer is formed with a downwardly facing positioning bore (58) and a forwardly facing recess (60) (both illustrated in dotted lines). The region (F) of the housing of the dust collection unit (40) is formed with a corresponding cylindrical upwardly extending positioning projection (62) for cooperating with the positioning bore (58) in the region (A) of the hammer housing. The region (F) of the dust collection unit (40) is also provided with a manually retractable latch arrangement (66), for releasably engaging with the recess (60) in the region (A) of the hammer housing.

To connect the dust collection unit to the hammer, the plug arrangement (12) of the dust collection unit is fitted to the socket arrangement (16) of the hammer, so as to form an electrical connection between the power supply to the hammer and the fan motor (51). With the plug arrangement (12) inserted in the socket arrangement (16), the forward end of the dust collection unit (40) can be moved upwardly towards engagement with the hammer housing until the positioning projection (62) on region (F) of the dust collection unit engages in the corresponding positioning recess (58) in region (A) of the hammer housing. In this movement a rearward end of the latching peg (66) is pushed into the chamber (64) in the region (F) of the dust collection unit, against the biasing force of a spring (68) by the portion (84) of the hammer housing between the bore (58) and recess (60). Then as soon as the rearward end (66a) of the latch peg comes into alignment with the recess (60) in region (A) of the hammer

housing the spring (68) biases the rearward end of the latch peg (66) into engagement with the recess (60), to thereby secure the dust collection unit to the hammer.

5 The dust collection unit is released from the hammer housing by a user depressing a button formed by an actuator of the latch arrangement, causing the latch peg (66) to retract from the recess (60). Then the dust collection unit can be moved downwardly to disengage the plug arrangement (12) from the socket arrangement (16).

10 A tube like shroud adapter (22), shown in Figures 3 to 6B, can be releaseably fitted within the forwardly open annular portion (30) of the shroud by a friction or a snap fit connection.

15 The adapter comprises a cylindrical sleeve (28) the rearward end of which can be releaseably fitted within the annular portion (30) of the shroud (32). The adapter has a sliding sleeve (54) slideably mounted on the cylindrical sleeve (28) so as to be able to move between a retracted position, as shown in Figures 4A, 6A and 6B, and an extended position, as shown in Figures 3, 4B, 5A and 5B. The sliding sleeve (54)
20 may, for example be made of a transparent plastic material.

In the retracted position, the adapter can be used for collecting dust when drilling into corners. At the forward end of the cylindrical sleeve (28) are formed two opposing V-shaped ridges (52). The ridges at the forward end of the cylindrical
25 sleeve (28) enable the shroud adapter to fit into a corner. Where a hole is to be bored into a corner, the adapter (22) is fitted to the shroud, and the support arm (36) is positioned with respect to the receiving portion (38) so that the forward edge of the cylindrical sleeve (28) with its V-shaped ridges (52) will fit against the surfaces forming the corner. That is, the tip of the tool or bit (24) will be aligned with the points
30 of the V-shaped ridges of the sleeve (28). Thus, any dust generated will be entrained in an airflow, which airflow enters the forward end of the sleeve (28) and then into the shroud (42), channel (14), support arm (36) and filter chamber (41). The airflow is pulled through the filter bag (43) and into the fan. Dust generated by the boring of a

hole by the tool or bit (24) will be entrained in this airflow will be deposited in the filter bag (43).

5 In the extended position, the adapter can be used to collect dust when drilling into channels or in wall surfaces adjacent to pipes or boxed in wires. This is because fitting the adapter (22) with the sliding sleeve in the extended position, onto the shroud increases the axial length (L) (See Figure 4B) of the shroud/adapter assembly forwardly of the forward face of the extension (14). Thus, the adapter could be used to collect dust from a hole drilled in a position (X) of a surface (60) (shown in dotted lines) of a channel (shown in dotted lines), as shown in Figure 4B, whereas the shroud alone, as shown in Figure 2, would not easily fit into the channel.

15 The sliding sleeve (54) is forwardly biased on the cylindrical sleeve (28) into the extended position shown in Figure 3, by a spring (62). The spring is connected at its rearward end and bears against an annular shoulder (64) formed around the cylindrical sleeve (28) and is connected at its forward end and bears against the rearward edge (66) of the sliding sleeve (54). The sliding sleeve is held on the cylindrical sleeve (28) by the spring (62). The sliding sleeve (54) can be retracted automatically by engagement with the surfaces of a corner against which the shroud adapter (22) is urged. Alternatively, the sliding sleeve may be retracted manually and held in the retracted position by a releasable catch.

25 As an alternative to the design described above, the shroud (32) and the cylindrical sleeve (28) could be formed as a single part, which could be fitted on the extension arm (36) via the extension (14) in place of the shroud (32) of Figure 2.

CLAIMS

1. A dust collection unit suitable for use with a hand held drilling and/or hammering tool, comprising:
 - 5 a shroud (34) adapted to extend around a tool or bit (24) of such a hammering and/or drilling tool so as to collect dust in an airflow passing through the dust extraction unit which dust is generated by such a tool or bit; and
 - a tube like extension sleeve (28) which extends forwardly from the shroud, with respect to such a tool or bit;
- 10 characterised in that a slideable sleeve (54) is slideably mounted on the extension sleeve so as to move between a retracted position in which the forward rim of the extension sleeve is engageable with a surface to be worked and an extended position in which a forward rim of the slideable sleeve is engageable with a surface to be worked and the forward ends of the extension sleeve and the slideable sleeve are
- 15 shaped differently from each other so as to fit against a different shape of work surface.
2. A dust collection unit according to claim 1 wherein one of the extension sleeve or the slideable sleeve is tapered at its forward end so as to have a forward rim which
- 20 fits into a corner of a surface to be worked.
3. A dust collection unit according to claim 2 wherein the tapered forward rim is formed to have a pair of opposing V-shaped ridges (52).
- 25 4. A dust collection unit according to claim 2 or claim 3 wherein the other of the extension sleeve or the slideable sleeve has a forward rim which extends perpendicularly to the longitudinal axis of such a tool or bit so as to fit against a plane surface to be worked.
- 30 5. A dust collection unit according to any one of the preceding claims wherein the tube like extension sleeve and the slideable sleeve are formed as an adapter (22) which can be releasably fitted to the shroud.

6. A dust collection unit according to any one of the preceding claims wherein the sliding sleeve is slideably mounted around the extension sleeve.

5 7. A dust collection unit according to any one of the preceding claims wherein the sliding sleeve is biased into its extended position by a spring arrangement (62).

8. A dust collection unit according to any one of the preceding claims comprising an extension arm (36) on which the shroud (32) can be mounted, a filter housing (41) which communicates with the shroud via the extension arm and incorporates a filter,
10 arranged such that the dust collecting airflow passes from the shroud, through the extension arm, into the filter housing and through the filter.

9. A dust collection unit according to claim 8 wherein the dust collection unit (40) includes a fan (51) for generating the dust collecting airflow.

15 10. A dust collection unit substantially as hereinbefore described with reference to any one of the accompanying Figures.

11. A shroud adapter suitable for fitment to a dust collecting shroud (34) of a dust
20 collection unit (40), which dust collection unit is suitable for use with a hand held drilling and/or hammering tool, the shroud adapter comprising a tube like extension sleeve (28) which can be releaseably fitted to such a shroud so as to extend forwardly from such a shroud characterised in that a slideable sleeve (54) is slideably mounted on the extension sleeve so as to move between a retracted position in
25 which the forward rim of the extension sleeve is engageable with a surface to be worked and an extended position in which a forward rim of the slideable sleeve is engageable with a surface to be worked and the forward ends of the extension sleeve and the slideable sleeve are shaped differently from each other so as to fit against a different shape of work surface.

30 12. An adapter according to claim 11 wherein one of the extension sleeve or the slideable sleeve is tapered at its forward end so as to have a forward rim which fits into a corner of a surface to be worked.

13. An adapter according to claim 12 wherein the tapered forward rim is formed to have a pair of opposing V-shaped ridges (52).

14. An adapter according to any one of claim 12 or claim 13 wherein the other of
5 the extension sleeve or the slideable sleeve has a forward rim which is shaped to fit against a plane surface to be worked.

15. An adapter according to any one of claims 11 to 14 wherein the sliding sleeve is slideably mounted around the extension sleeve.

10

16. An adapter according to any one of claims 11 to 15 wherein the sliding sleeve is biased into its extended position by a spring arrangement (62).

17. A shroud adapter suitable for fitment to a dust collecting shroud (34) of a dust
15 collection unit (40), which dust collection unit is suitable for use with a hand held drilling and/or hammering tool substantially as hereinbefore described with reference to any one of the accompanying Figures .

18. A shroud for a dust collection unit (40), which dust collection unit is suitable for
20 use with a hand held drilling and/or hammering tool, which shroud can be releasably fitted to such a dust extraction unit so as to extend around a tool or bit (24) of such a hammering and/or drilling tool so as to collect dust in an airflow passing through the shroud which dust is generated by such a tool or bit, the shroud additionally comprising a forwardly extending tube like extension sleeve (28), characterised in
25 that a slideable sleeve (54) is slideably mounted on the extension sleeve so as to move between a retracted position in which the forward rim of the extension sleeve is engageable with a surface to be worked and an extended position in which a forward rim of the slideable sleeve is engageable with a surface to be worked and the forward ends of the extension sleeve and the slideable sleeve are shaped differently from
30 each other so as to fit against a different shape of work surface.



19. A shroud according to claim 18 wherein one of the extension sleeve or the slideable sleeve is tapered at its forward end so as to have a forward rim which fits into a corner of a surface to be worked.

20. A shroud according to claim 19 wherein tapered forward rim is formed to have a pair of opposing V-shaped ridges (52).
- 5 21. A shroud unit according to claim 19 or claim 20 wherein the other of the extension sleeve or the slideable sleeve has a forward rim which extends perpendicularly to the longitudinal axis of such a tool or bit so as to fit against a plane surface to be worked.
- 10 22. A shroud according to any one of claims 18 to 21 wherein the sliding sleeve is slideably mounted around the extension sleeve.
23. A shroud according to any one of claims 18 to 22 wherein the sliding sleeve is biased into its extended position by a spring arrangement (62).
- 15 24. A shroud suitable for fitment to a dust collection unit (40), which dust collection unit is suitable for use with a hand held drilling and/or hammering tool substantially as hereinbefore described with reference to any one of the accompanying Figures .

ABSTRACT**DUST COLLECTION UNIT**

A dust collection unit suitable for use with a hand held drilling and/or hammering tool, comprising a shroud (34) which is adapted to extend around a tool or bit (24) of such a hammering and/or drilling tool so as to collect dust in an airflow passing through the shroud which dust is generated by such a tool or bit. A tube like extension sleeve (28) extends forwardly from the shroud, with respect to such a tool or bit, which extension sleeve (28) is tapered at its forward end so as to have a forward rim which fits into a corner of a surface to be worked. A slideable sleeve (54) is slideably mounted on the extension sleeve so as to move between a retracted position in which the tapered forward rim of the extension sleeve (28) is engageable with a corner surface to be worked and an extended position in which a forward rim of the slideable sleeve (54) is engageable with a surface to be worked.

Figure 3.

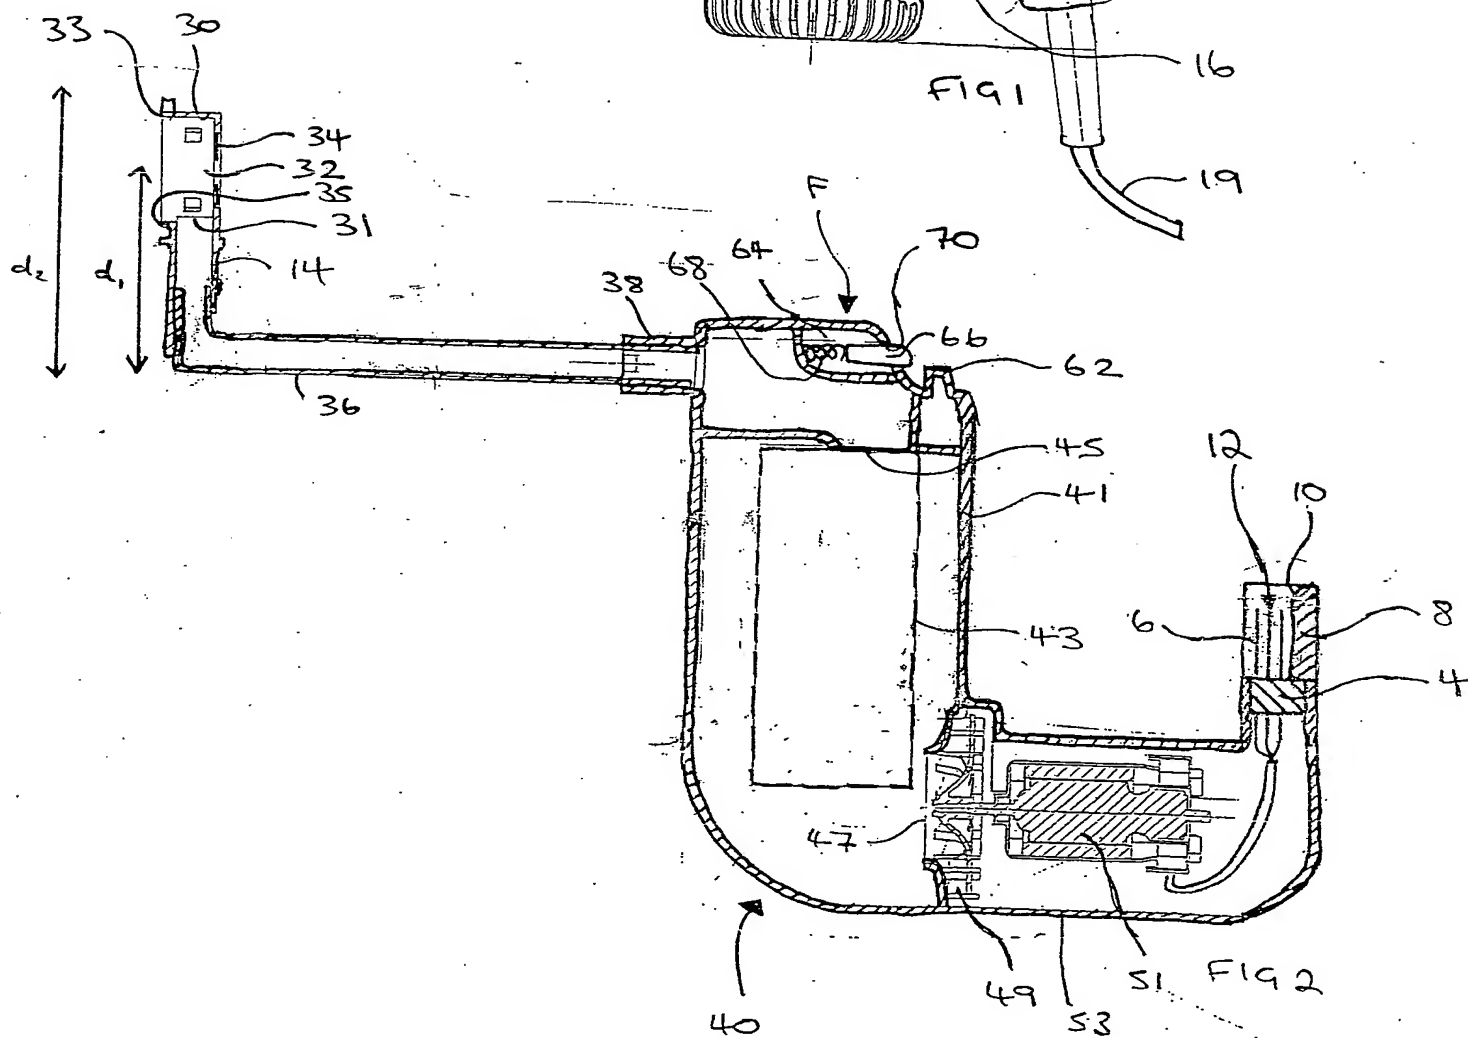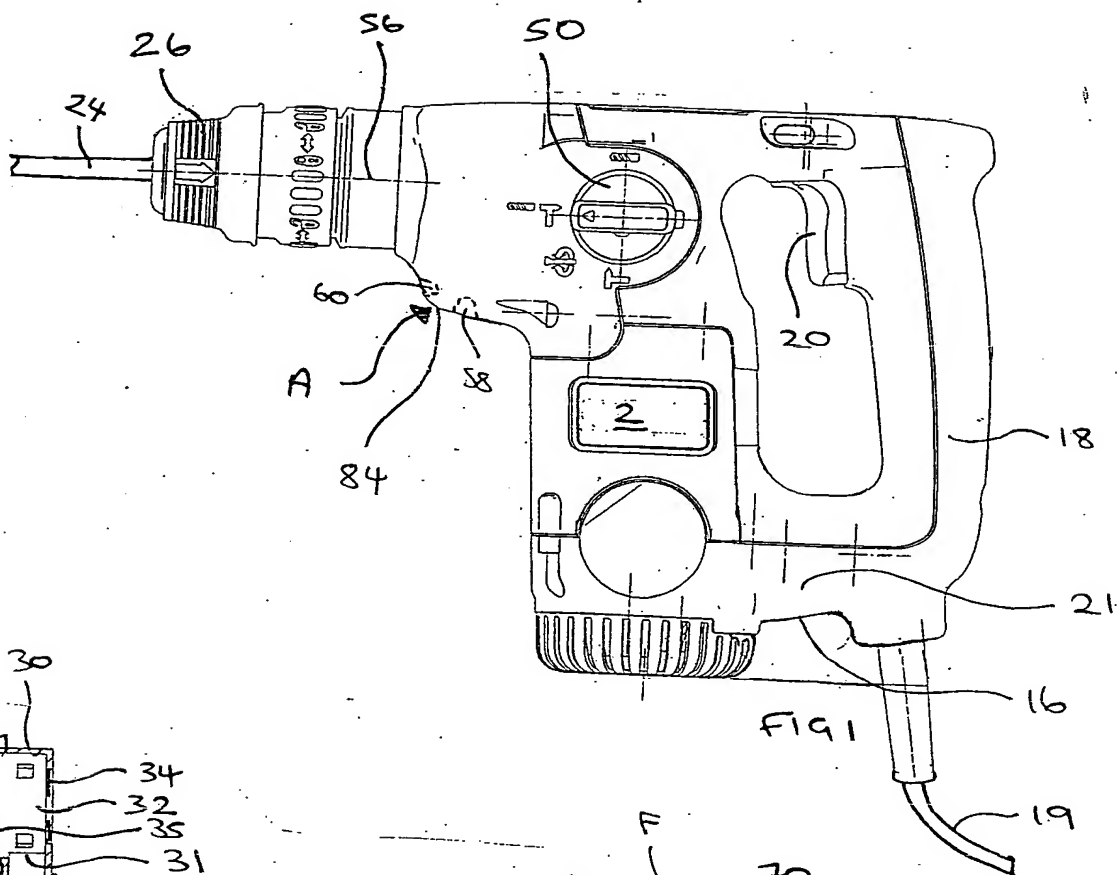

THIS PAGE BLANK (USPTO)

2/2

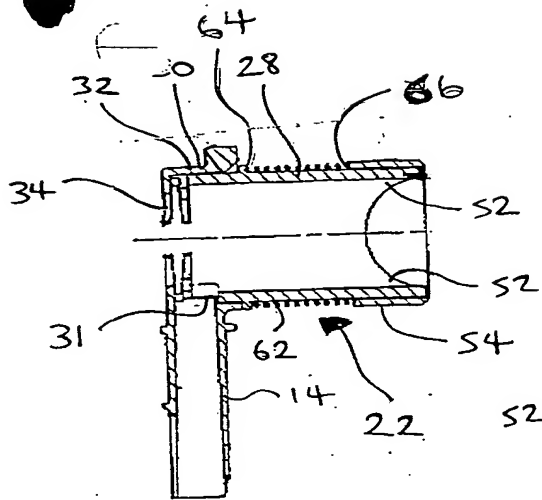


FIG 3

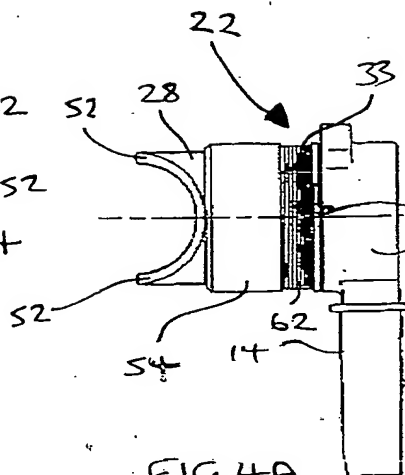


FIG 4A

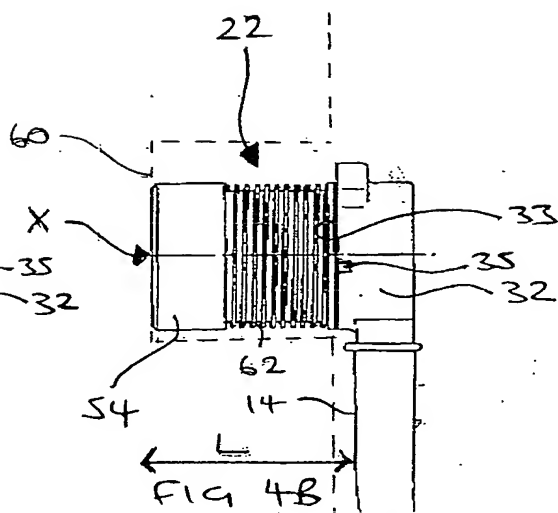


FIG 4B

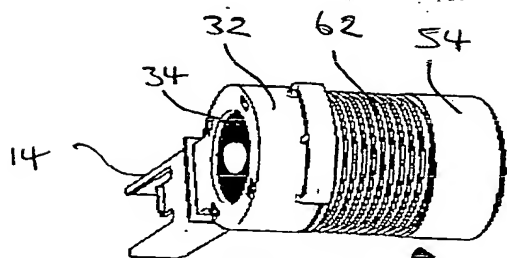


FIG 5A

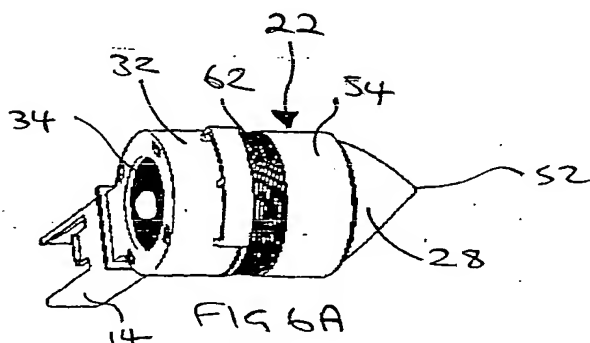


FIG 6A

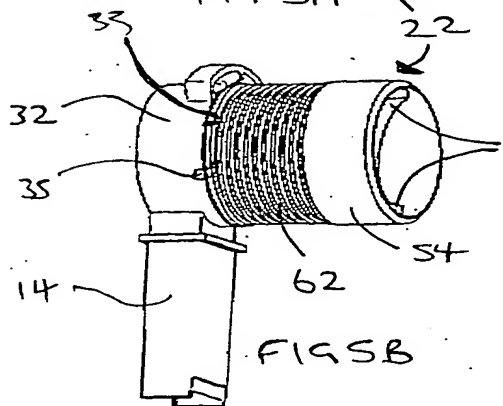


FIG 5B

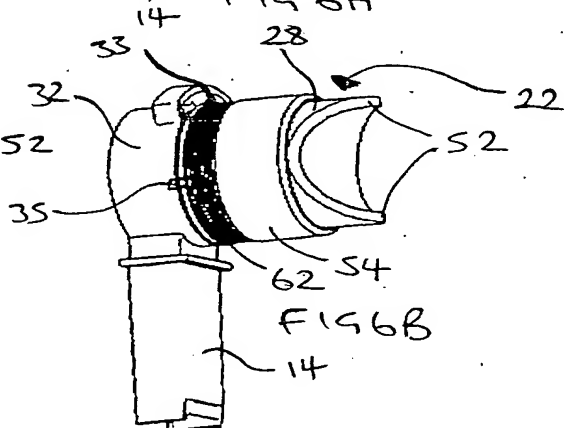


FIG 6B

THIS PAGE BLANK (USPTO)